


Tylose[®]

for Paints



Tylose® for Paints

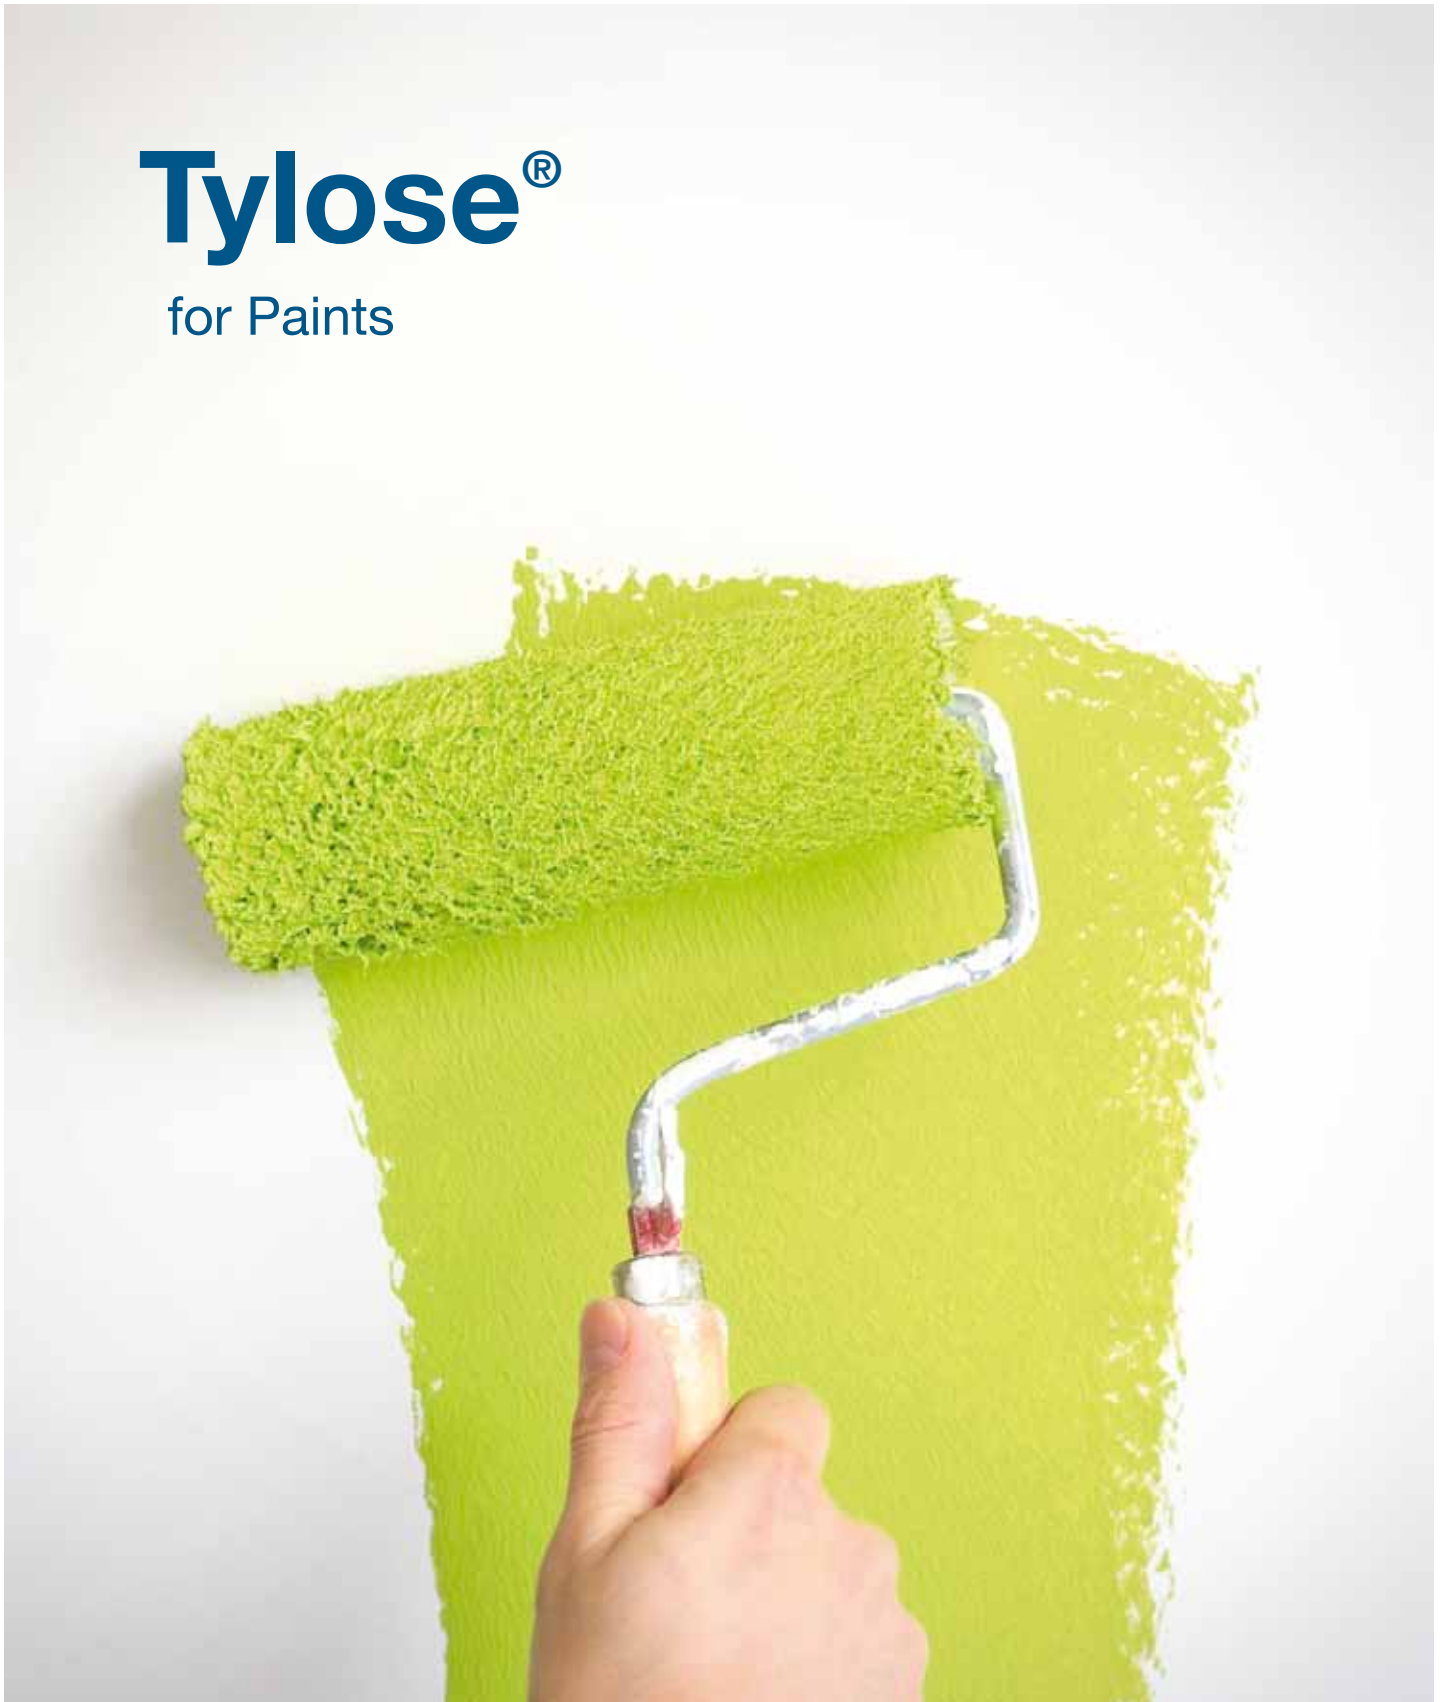

There are many reasons why Tylose is an important component in water based paints for ceilings, walls and facades.

Application of paint should be smooth and easy, whilst

spatter must be kept to a minimum. To achieve these attributes only a small amount of Tylose is necessary. Depending on the system being used, a concentration of 0.2 % – 0.5 % is typically required. The choice of Tylose types depends on the application and requirements. The most commonly used Tylose types in coating materials are Tylose HS and Tylose H.

Application Properties

The following properties of Tylose are essential for the optimisation of coating materials:

- **Thickening / Adjustment of consistency**
- **Water retention**
- **Function as a protective colloid**
- **Binding power**

The inclusion of Tylose can improve the following properties of dispersion paints:


- **Rheological properties such as levelling and spattering**
- **Storage stability**
- **Open time**
- **Hiding power**
- **Film formation**

Thickening / Adjustment of Consistency

Technically, the most important property of Tylose® is its capability to increase the viscosity of liquids and thus to act as a thickener. The thickening effect of Tylose strongly depends on its concentration (depicted in the diagram below). Furthermore, the

influence of the degree of polymerisation (shown in the form of different viscosity levels) on the thickening effect of Tylose can be clearly seen. With all other parameters constant, the viscosity of Tylose solutions increases with an increasing viscosity level.


Influence of the concentration on the thickening effect of Tylose

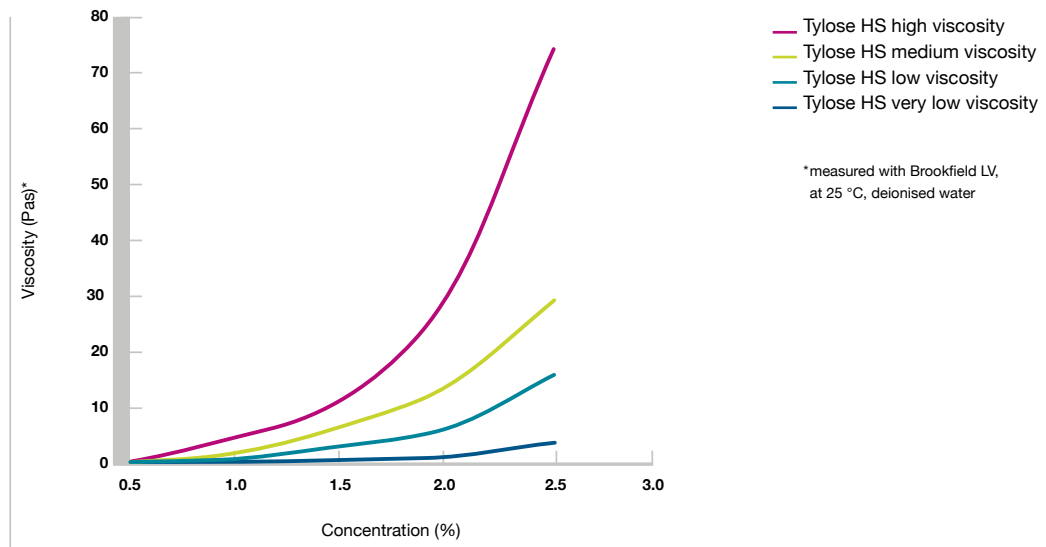

Aqueous solutions of Tylose show a pseudoplastic effect (shear thinning), which means with an increase in shear rate, the viscosity of the solutions declines. This pseudoplasticity is specific to each Tylose type

and the respective viscosity of the grade. High viscosity Tylose grades have a stronger shear thinning effect than those of low viscosity, which is shown in the diagram below.

Pseudoplastic behaviour of Tylose

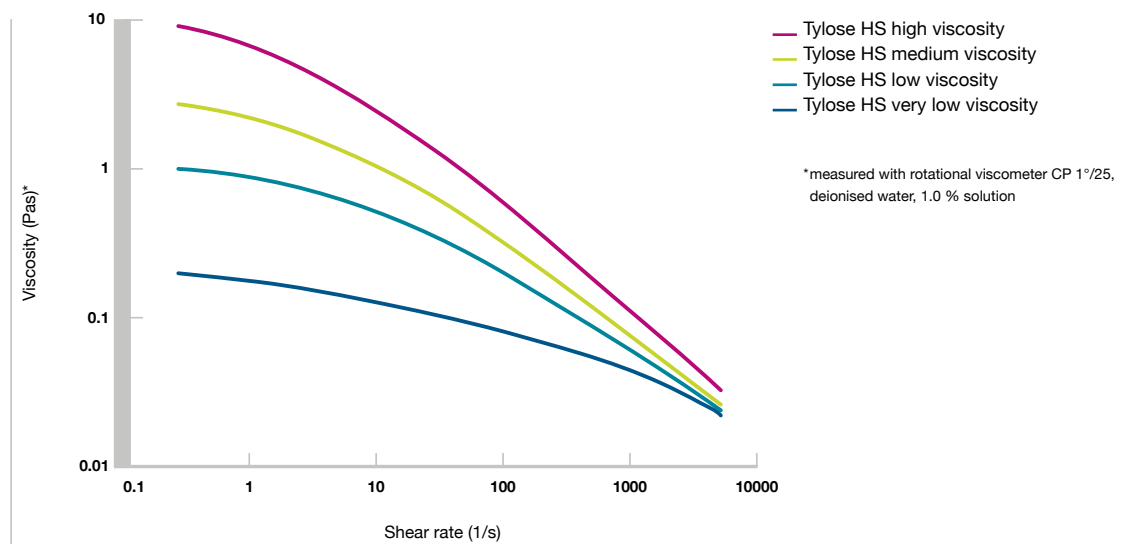


Thickening / Adjustment of Consistency



Tylose® ensures the required consistency for application by providing a certain rheological profile or flow property. This makes the application of paint easy.

The amount of Tylose as well as its viscosity determines the viscosity level and leads to optimal application properties. During application, a decreasing viscosity with increasing shear stress is desirable.

The pseudoplasticity serves to optimise application properties of the coating system with respect to rolling, brushing resistance and spattering behaviour. For interior paints with low spattering the use of hydrophobic modified Tylose is recommended. Through the associative thickening effect with the binder, the viscosity at high shear rates will be increased, thus reducing the spatter. The correlation of the rheology profile of a paint and the application properties are shown in the diagram below.

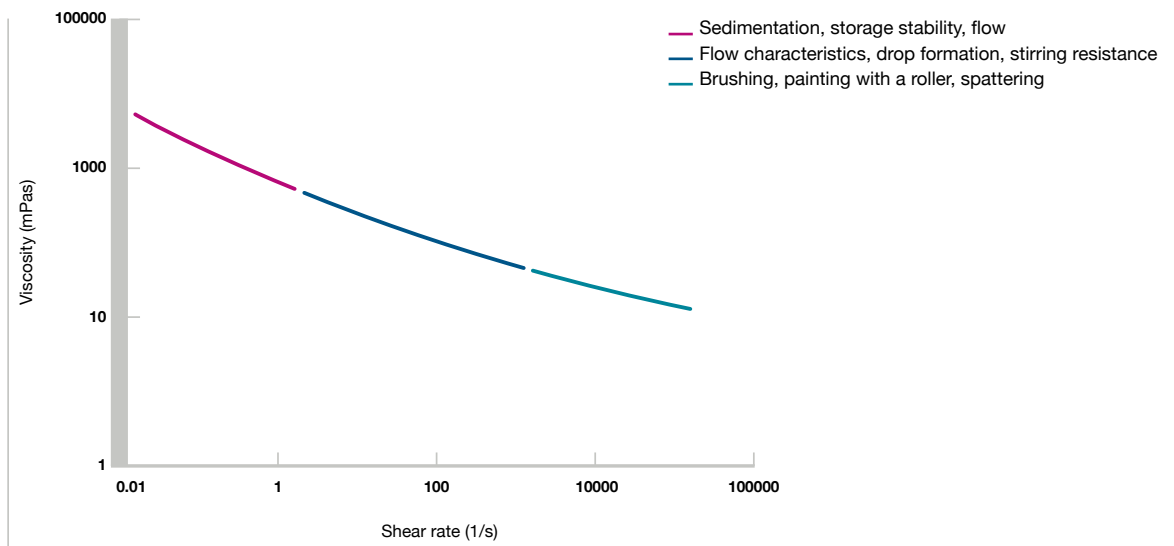

Because of its thickening effect in coatings, Tylose acts as a stabiliser for the dispersed components. The formation of serum, i.e. the tendency to precipitate displayed by insoluble components such as pigments

and fillers etc., is slowed down or even stopped completely. As a result, the coating material is protected against slow sedimentation of its components and is also stable during storage.

Water Retention



An important property of Tylose® is its pronounced water retention capability. It prevents the water from penetrating into the absorbing substrate too quickly which results in a better adhesion to the substrate. To the greatest possible extent, the water will be retained in the coating material during drying. A uniform film formation is ensured and incipient cracking is avoided.

Particularly in formulations with high pigment volume concentration, the water retaining effect of Tylose ensures sufficient open time for application. Adequate water retention in paints depends mainly on the concentration and viscosity level as well as on the type and temperature of the substrate.

Function as Protective Colloid

Coating materials are predominantly dispersions of pigments and fillers in an aqueous medium. Tylose acts as a protective colloid by preventing the agglomeration of the solid particles. This leads to a better storage stability and easier agitation of the paint.

Due to its molecular structure and its specific properties, Tylose is a highly effective protective colloid. It is widely used in other application fields, such as polymerisation, to avoid the coagulation of the polymer.

Binding Power

Especially in distempers, Tylose acts as a binder by combining the solid particles and binding them to the substrate. Tylose has strong adhesive power, good dry

binding power and dry adhesion.

For these reasons, Tylose ensures a good adhesion between the coating and substrate.

Recommended Tylose® Products for Coating Materials

Tylose grades	Viscosity	Delayed solubility	Applications											
			Interior Paints	Solid Paints	Exterior Paints	Silicone Resin Paints	Tinters	Powder Paints	Silicate Paints	Limewash Paints	Cement Paints	Distempers	Glazes	Paint-stripping Pastes
Tylose H / HS														
Tylose H 6000 YP2	5200 (2.0 %) ^{*1}	●	■					■	■	■			■	■
Tylose H 15000 YP2	1200 (1.0 %) ^{*1}	●	■		■	■		■		■				
Tylose H 30000 YP2	2000 (1.0 %) ^{*1}	●	■		■	■				■				
Tylose H 60000 YP2	3000 (1.0 %) ^{*1}	●	■											
Tylose H 100000 YP2	4500 (1.0 %) ^{*1}	●	■		■									
Tylose H 200000 YP2	5700 (1.0 %) ^{*1}	●	■											
Tylose HS 6000 YP2	5200 (2.0 %) ^{*1}	●	■	■				■	■	■				■
Tylose HS 15000 YP2	1200 (1.0 %) ^{*1}	●	■	■	■	■		■		■				
Tylose HS 30000 YP2	2000 (1.0 %) ^{*1}	●	■		■	■				■				
Tylose HS 60000 YP2	3000 (1.0 %) ^{*1}	●	■											
Tylose HS 100000 YP2	4500 (1.0 %) ^{*1}	●	■		■									
Hydrophobically modified HEC														
Tylose HX 6000 YG4 Plus	550 (1.0 %) ^{*1}	●	■		■	■								
Tylose MH														
Tylose MH 2000 YP2	2700 (1.9 %) ^{*2}	●	■						■		■	■	■	■
Tylose MH 6000 YP4	6700 (1.9 %) ^{*2}	●							■		■	■	■	■
Tylose MH 15000 YP4	13000 (1.9 %) ^{*2}	●		■	■									
Tylose MH 30000 YP4	23000 (1.9 %) ^{*2}	●	■		■	■								
Special grades														
Tylose MB 60000 P2	31000 (1.9 %) ^{*2}													■
Tylose PSO 810001	6300 (1.0 %) ^{*2}													■

■ recommended

^{*1} Brookfield LV, 25 °C, deionised water

^{*2} Brookfield RV, 20 °C, water 20 °dH (German hardness)

Nomenclature of Tylose®


Example: Tylose HS 30000 YP2

HS		30000	YP2	
Chemical composition and type of etherification			Viscosity level	Particle size distribution and chemical refinement
Type of ether			The viscosity level is based on Hoesppler: 2 % solution of the commercial product with 5 % moisture content, 20 °C, 20 °dH (German hardness)	Y Delayed solubility*
M	Methyl	∴		
H	Hydroxyethyl	100000		
X	Hydrophobic modification	60000		
Degree of etherification		30000		
		15000		Particle size
		10000		
B	Higher etherification	6000		G4 Granules (< 500 µm)
S	Tylose HS: biostable	1000		P2 Powder (< 180 µm)
		∴		P4 Fine powder (< 125 µm)

*Delayed solubility

Tylose products with delayed solubility are denoted with an additional 'Y'. Delayed solubility Tylose grades can easily be suspended in pH neutral water without forming any lumps. Adjusting the pH to alkaline values can eliminate the delayed solubility. Please note that the pH value should be adjusted after the Tylose is completely dispersed. Raising the pH before dispersion results in lumps.

Dissolution time of a delayed solubility Tylose grade at various pH values

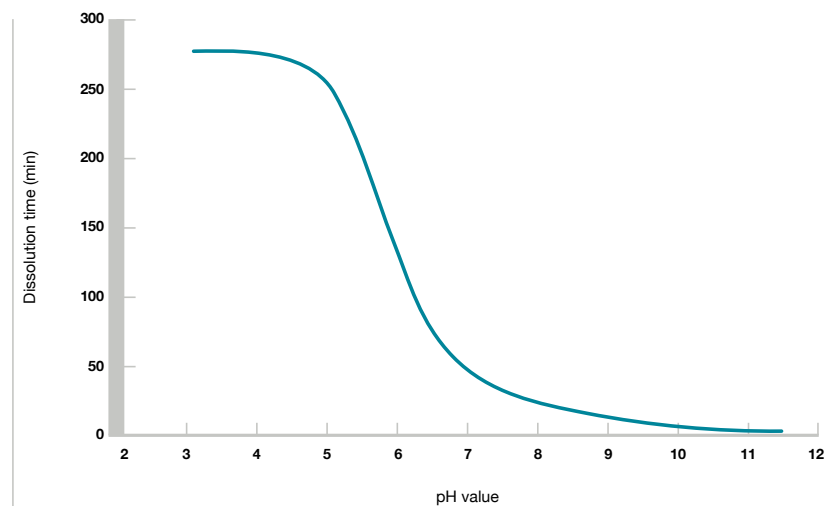



Company Address

SE Tylose GmbH & Co. KG
Industriepark Kalle-Albert
Rheingaustraße 190 - 196
65203 Wiesbaden
Germany

Phone +49 611 962 - 04
Internet www.SETylose.com



Product Safety

E-Mail Product.Safety@SETylose.com

Customer Service

Reiner Posprich
Phone +49 611 962 - 6325
Fax +49 611 962 - 9082
E-Mail Reiner.Posprich@SETylose.com

Technical Sales Support

Phone +49 611 962 - 8571
Fax +49 611 962 - 9267
E-Mail info@SETylose.com

About us

SE Tylose GmbH & Co. KG is one of the major manufacturers of cellulose ethers world-wide, supplied under the brand name Tylose®. Tylose is used in a wide variety of products and applications.

Applications	
	Building Materials
	Paints
	Oilfield
	Personal Care
	Home Care
	Emulsion Polymerisation
	Suspension Polymerisation
	Ceramics
	Pet Litter
	Organo Soluble Applications
	Others

The information in this publication corresponds to the present state of our knowledge and is intended to describe our products and their possible applications. It is not intended to guarantee the suitability of particular product characteristics for a specific use. Any existing industrial rights are to be taken into consideration. Quality is guaranteed in accordance with our general conditions of sale.

® = Registered Trademark

02/2017